

DC

Design Castors

The DC series offers a sleek and economical option for general institution applications.

With its clean ABS shields, these castors provide an aesthetically pleasing appearance. Designed with a focus on quality and a human touch, the DC series is an ideal solution for carts and trolleys that demand both form and function.

Trust the DC series to provide the performance, reliability and preferable appearance you need for your institutional equipment.

Application:

General medical mobile device

High tech transportation equipment

Size available :

KS series, 125*30mm

MS series, 125*30mm

DT series, 150*32mm

TS series, 150*40mm



KS/MS: Zn-plated steel yoke, double ball-race swivel head, precision ball bearing at wheel center, ABS shield.
DT/TS: Zn-plated steel yoke, precision ball bearing at swivel head and wheel center, ABS shield.

Top Plate Fitting TPR wheel



Catis Code	 mm	 mm	 Fitting	 mm	 mm	 mm	 kg
KS125BP1A/02U	125	30	P1A	39	165	106	100
DT150BP1/03U	150	32	P1	50	192.5	127	120



Catis Code	mm	mm	Fitting	mm	mm	mm	kg
KS125DBP1A/02U	125	30	P1A	39	165	106	100
DT150DBP1/03U	150	32	P1	50	192.5	127	120



Catis Code	mm	mm	Fitting	mm	mm	mm	kg
MS125BP1A/02U	125	30	P1A	39	165	107	100
DT150BBP1/03U	150	32	P1	50	192.5	127	120



Conductive wheel is also available.
Add "K-AS" suffix to Catis code, e.g. KS125BP1A/02UK-AS, DT150BP1/03UK-AS

Threaded Stem Fitting TPR wheel



Catis Code	 mm	 mm	 Fitting	 mm	 mm	 mm	 kg
KS125BT5/02U	125	30	T5	39	161	106	100
DT150BT5/03U	150	32	T5	50	192.5	127	120





Catis Code	mm	mm	Fitting	mm	mm	mm	kg
KS125DBT55/02U	125	30	T55	39	161	106	100
DT150DBT55/03U	150	32	T55	50	192.5	127	120




Catis Code	mm	mm	Fitting	mm	mm	mm	kg
MS125BT55/02U	125	30	T55	39	161	107	100
DT150BBT55/03U	150	32	T55	50	192.5	127	120



Conductive wheel is also available.
Add "K-AS" suffix to Catis code, e.g. KS125BT5/02UK-AS, DT150BT5/03UK-AS

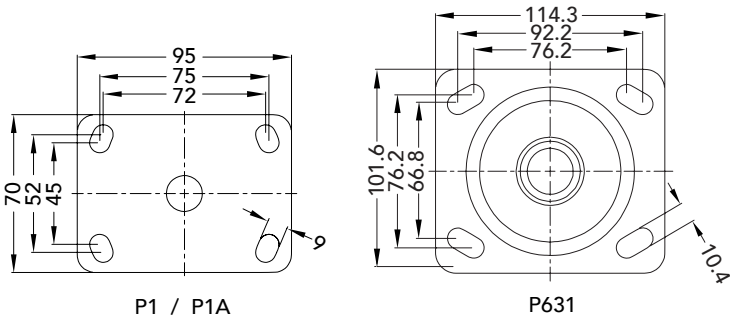

Code	D
T2	1/2-13UNC x 1"
T4	M12 x 25mm P=1.75
T5	M16 x 25mm P=2.0
T55	M16 x 25mm P=2.0

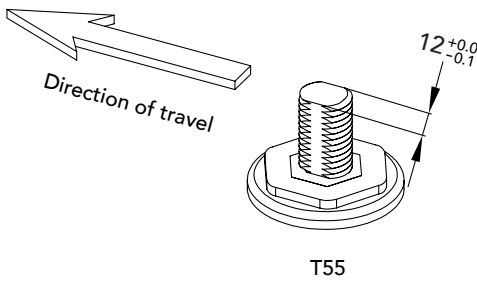

KS/MS: Zn-plated steel yoke, double ball-race swivel head, precision ball bearing at wheel center, ABS shield.
DT/TS: Zn-plated steel yoke, precision ball bearing at swivel head and wheel center, ABS shield.

Round Stem Fitting TPR wheel



Catis Code	 mm	 mm	 Fitting	 mm	 mm	 mm	 kg
KS125BR9/02U	125	30	R9	39	161	106	100
DT150BR9/03U	150	32	R9	50	192.5	127	120




Catis Code	mm	mm	Fitting	mm	mm	mm	kg
KS125DBR9/02U	125	30	R9	39	161	106	100
DT150DBR9/03U	150	32	R9	50	192.5	127	120



Catis Code	mm	mm	Fitting	mm	mm	mm	kg
MS125BR9/02U	125	30	R9	39	161	107	100
DT150BBR9/03U	150	32	R9	50	192.5	127	120



Conductive wheel is also available.
Add "K-AS" suffix to Catis code, e.g. KS125BR9/02UK-AS, DT150BR9/03UK-AS



Code	d	L	a	Ø
R63	18	28	19	M8 x 1.25
R8	22	45	19	M8 x 1.25
R9	28	45	19	M8 x 1.25

Top Plate Fitting TPU wheel



Catis Code	 mm	 mm	 Fitting	 mm	 mm	 mm	 kg
KS125BP1A/01U	125	30	P1A	39	165	106	100
DT150BP1/05U	150	32	P1	50	192.5	127	120




Catis Code	mm	mm	Fitting	mm	mm	mm	kg
KS125DBP1A/01U	125	30	P1A	39	165	106	100
DT150DBP1/05U	150	32	P1	50	192.5	127	120



Catis Code	mm	mm	Fitting	mm	mm	mm	kg
MS125BP1A/01U	125	30	P1A	39	165	107	100
DT150BBP1/05U	150	32	P1	50	192.5	127	120
TS150BP631/35U	150	40	P631	46	196.5	127	150



Conductive wheel is also available.
Add "K-AS" suffix to Catis code,
e.g. KS125BP1A/01UK-AS, DT150BP1/05UK-AS, TS150BP631/35UK-AS

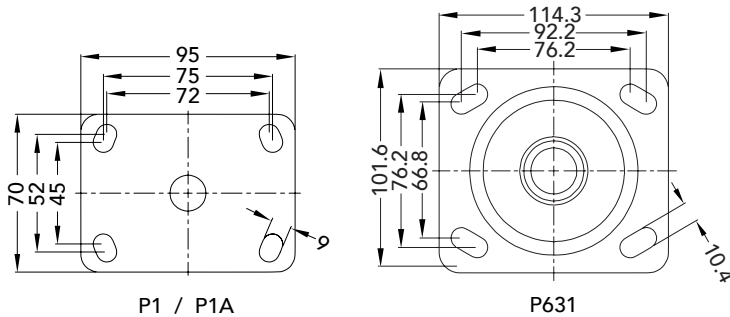

KS/MS: Zn-plated steel yoke, double ball-race swivel head, precision ball bearing at wheel center, ABS shield.
DT/TS: Zn-plated steel yoke, precision ball bearing at swivel head and wheel center, ABS shield.

Threaded Stem Fitting TPU wheel

Total Lock



KS125 DT150

Catis Code	mm	mm	Fitting	mm	mm	mm	kg
KS125BT5/01U	125	30	T5	39	161	106	100
DT150BT5/05U	150	32	T5	50	192.5	127	120

Directional Lock



KS125 DT150

Catis Code	mm	mm	Fitting	mm	mm	mm	kg
KS125DBT55/01U	125	30	T55	39	161	106	100
DT150DBT55/05U	150	32	T55	50	192.5	127	120

Bi-Brake




MS125 DT150 TS150

Catis Code	mm	mm	Fitting	mm	mm	mm	kg
MS125BT55/01U	125	30	T55	39	161	107	100
DT150BBT55/05U	150	32	T55	50	192.5	127	120
TS150BT55/35U	150	40	T55	46	196.5	127	150




Conductive wheel is also available.

Add "K-AS" suffix to Catis code,
e.g. KS125BT5/01UK-AS, DT150BT5/05UK-AS, TS150BT55/35UK-AS



Code	D
T2	1/2-13UNC x 1"
T4	M12 x 25mm P=1.75
T5	M16 x 25mm P=2.0
T55	M16 x 25mm P=2.0

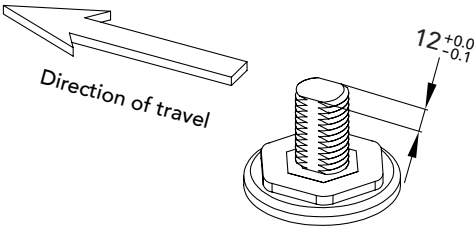

T55

Round Stem Fitting TPU wheel

Total Lock



KS125 DT150

Catis Code	mm	mm	Fitting	mm	mm	mm	kg
KS125BR9/01U	125	30	R9	39	161	106	100
DT150BR9/05U	150	32	R9	50	192.5	127	120

Directional Lock



KS125 DT150

Catis Code	mm	mm	Fitting	mm	mm	mm	kg
KS125DBR9/01U	125	30	R9	39	161	106	100
DT150DBR9/05U	150	32	R9	50	192.5	127	120

Bi-Brake




MS125 DT150 TS150

Catis Code	mm	mm	Fitting	mm	mm	mm	kg
MS125BR9/01U	125	30	R9	39	161	107	100
DT150BBR9/05U	150	32	R9	50	192.5	127	120
TS150BR9/35U	150	40	R9	46	196.5	127	150



Conductive wheel is also available.

Add "K-AS" suffix to Catis code,
e.g. KS125BR9/01UK-AS, DT150BR9/05UK-AS, TS150BR9/35UK-AS



Code	d	L	a	Ø
R63	18	28	19	M8 x 1.25
R8	22	45	19	M8 x 1.25
R9	28	45	19	M8 x 1.25

KS/MS: Zn-plated steel yoke, double ball-race swivel head, precision ball bearing at wheel center, ABS shield.
DT/TS: Zn-plated steel yoke, precision ball bearing at swivel head and wheel center, ABS shield.

Top Plate Fitting ARB wheel




Catis Code	 mm	 mm	 Fitting	 mm	 mm	 mm	 kg
KS125BP1A/29U	125	30	P1A	39	165	106	100
DT150BP1/29U	150	32	P1	50	192.5	127	120



Catis Code	mm	mm	Fitting	mm	mm	mm	kg
KS125DBP1A/29U	125	30	P1A	39	165	106	100
DT150DBP1/29U	150	32	P1	50	192.5	127	120



Catis Code	mm	mm	Fitting	mm	mm	mm	kg
MS125BP1A/29U	125	30	P1A	39	165	107	100
DT150BBP1/29U	150	32	P1	50	192.5	127	120
TS150BP631/40U	150	40	P631	46	196.5	127	150

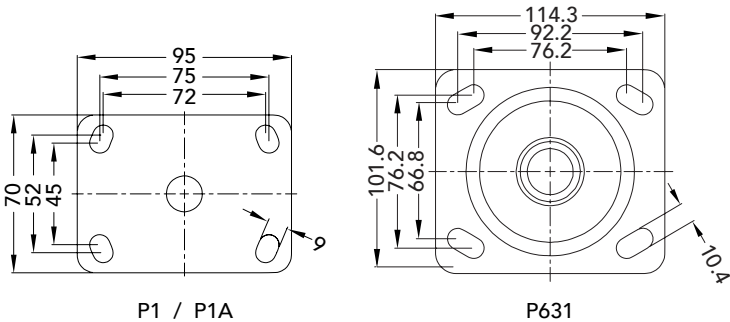

Threaded Stem Fitting ARB wheel




Catis Code	 mm	 mm	 Fitting	 mm	 mm	 mm	 kg
KS125BT5/29U	125	30	T5	39	161	106	100
DT150BT5/29U	150	32	T5	50	192.5	127	120




Catis Code	mm	mm	Fitting	mm	mm	mm	kg
KS125DBT55/29U	125	30	T55	39	161	106	100
DT150DBT55/29U	150	32	T55	50	192.5	127	120



Catis Code	mm	mm	Fitting	mm	mm	mm	kg
MS125BT55/29U	125	30	T55	39	161	107	100
DT150BBT55/29U	150	32	T55	50	192.5	127	120
TS150BT55/40U	150	40	T55	46	196.5	127	150



Code	D
T2	1/2-13UNC x 1"
T4	M12 x 25mm P=1.75
T5	M16 x 25mm P=2.0
T55	M16 x 25mm P=2.0

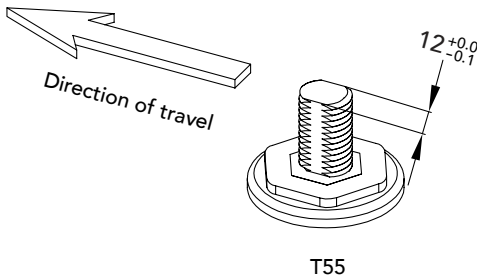

KS/MS: Zn-plated steel yoke, double ball-race swivel head, precision ball bearing at wheel center, ABS shield.
DT/TS: Zn-plated steel yoke, precision ball bearing at swivel head and wheel center, ABS shield.

Round Stem Fitting ARB wheel

Total Lock



KS125 DT150

Catis Code	 mm	 mm	 Fitting	 mm	 mm	 mm	 kg
KS125BR9/29U	125	30	R9	39	161	106	100
DT150BR9/29U	150	32	R9	50	192.5	127	120

Directional Lock



KS125 DT150


Catis Code	mm	mm	Fitting	mm	mm	mm	kg
KS125DBR9/29U	125	30	R9	39	161	106	100
DT150DBR9/29U	150	32	R9	50	192.5	127	120

Bi-Brake



MS125 DT150 TS150

Catis Code	mm	mm	Fitting	mm	mm	mm	kg
MS125BR9/29U	125	30	R9	39	161	107	100
DT150BBR9/29U	150	32	R9	50	192.5	127	120
TS150BR9/40U	150	40	R9	46	196.5	127	150



Code	d	L	a	Ø
R63	18	28	19	M8 x 1.25
R8	22	45	19	M8 x 1.25
R9	28	45	19	M8 x 1.25

